




DSL-250TDF SERIES


FRONT LED MULTIFUNCTIONAL OVAL-SHAPED LAMP

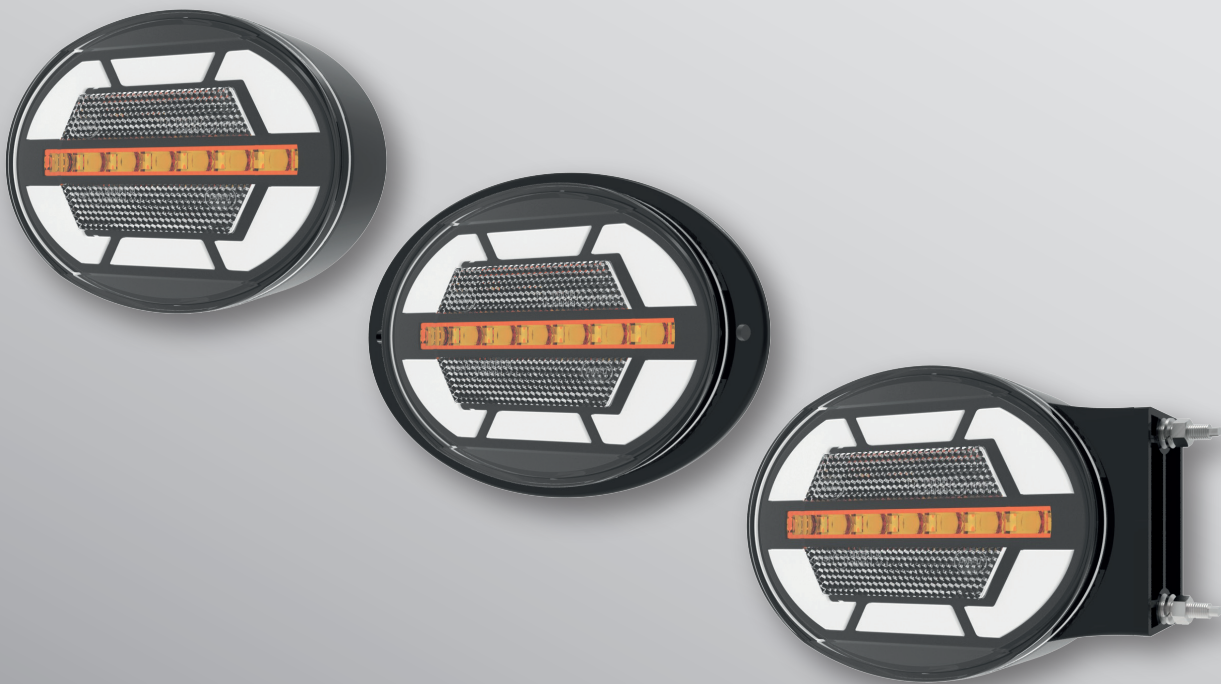

PRODUCT BENEFITS

- Attractive EU Oval-shaped design with Dynamic Direction Indicator
- 3 Alternative solutions for different Mounting
- IP67 Protection
- Multi-voltage 10-30V
- Robust Design with lens fixed to the housing for heavy outdoor use
- Front Position light which stands out due to Glowing Body Technology

FUNCTIONS LAYOUT

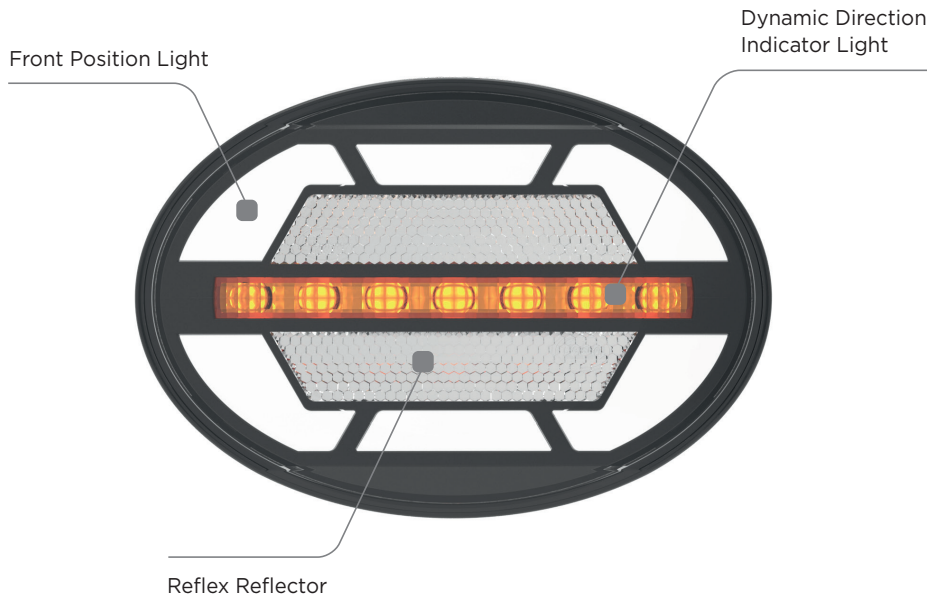

TECHNICAL SPECIFICATIONS

TECHNICAL DATA

Operating Voltage		10 V - 30 V		
Reverse Polarity Protection		Yes		
Light Function & Max. Consumption	Direction Indicator Light	5.5 W		
	Tail Light	2.5 W		
Temperature Range		- 40°C to + 65°C		
Type of Mounting		Fastening Bolts - M6 / Screws		
Material	Lens	PC (Clear)		
	Housing	ABS + PC (Black)		
Type of Protection		IP67		
Approvals	ECE	R148	R148	R150
		A	1	IA
	EMC	R10-06		
Type of Connection	Standard Versions	500mm Cable Output		

CODES OVERVIEW

Variants Ref. No.	Flat Base	Recessed Base	Lateral Base
DSL-250TDF.0	•		
DSL-250TDF.1		•	
DSL-250TDF.2			•

DIMENSIONAL DRAWING

