



WRKX-LED-300 SERIES

2-FUNCTION WORK / WARNING LED LAMP



PRODUCT BENEFITS

- Cost-effective product combining High Intensity Work Lamp & Warning Lamp in one
- Plastic housing design which extends product lifetime due to better heat dispersion
- Light-Weight Plastic Housing
- High Level EMC Class 3
- High level light output performance
- Carbon Alloy Plastic Anticorrosion Housing
- Multivoltage 12-24V
- IP69K Protection


FUNCTIONS LAYOUT



TECHNICAL INFORMATION


Product Number		WRKX-LED-300		WRKX-LED-310	
Operating Voltage		10V - 30V			
Reverse Polarity Protection		Yes			
Product Length (mm)		150		220	
Light Function		Work Lamp	Warning Lamp	Work Lamp	Warning Lamp
Consumption		30W	8W	40W	12W
Temperature Range		-40C / +65C			
Material	Lens	PC			
	Housing	Plastic			
Type of Protection		IP69K			
Approvals	ECE	—	R65 / CAT. XA1	—	R65 / CAT. XA1
	EMC	R10-06			
	CISPR 25	Class 3			
Lumen Output	Lumen	2850	—	3780	—
Type of Connection		Cable Output 500mm			

DIMENSIONAL DRAWING

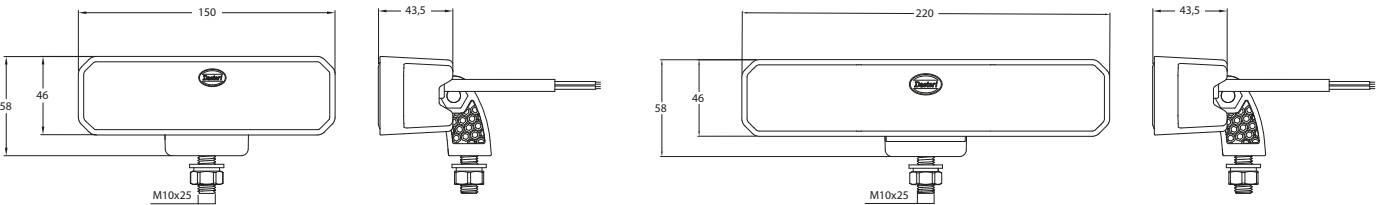

ISOLUX DIAGRAM

WRK-LED-310

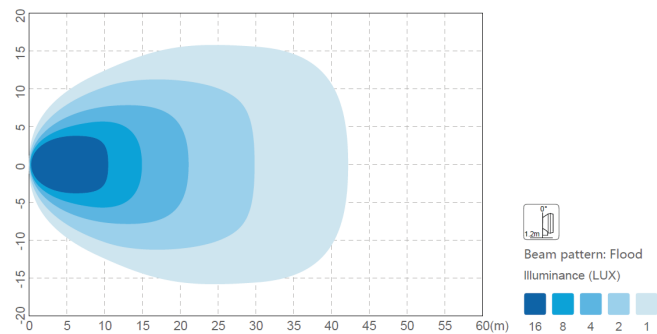

WRK-LED-310H

